

LINGEN_01-P



PROJECT

REFERENCE NUMBER

EX

LINGEN_01-P **24** **BC** - LED - 120V - **30K** **80** - 010V - **BLK** **OP**

MODEL SUSPENSION SOURCE TENSION CCT CRI DIMMING STRUCTURE DIFFUSER

DESIRED DELIVERY DATE

QUANTITY

NOTES

CONFIGURATIONS



FEATURES

CERT. UL / cUL:	E313355
VOLTAGE:	INDOOR USE ONLY
FINISH:	120V
	POWDER COATED

ORDER

MODEL

14	LINGEN Ø2" x 14"
18	LINGEN Ø2" x 18"
24	LINGEN Ø2" x 24"
30	LINGEN Ø2" x 30"
36	LINGEN Ø2" x 36"
CUS*	PERSONALIZED

* PLEASE CONTACT YOUR ABBE REPRESENTATIVE

SUSPENSION

BC	BLACK CABLE - 72"
WC	WHITE CABLE - 72"
CC	CLEAR CABLE - 72"
T30 ¹	RIGID STEM - 30"
T60 ¹	RIGID STEM - 60"
TS30 ¹	RIGID STEM SWIVEL - 30"
TS60 ¹	RIGID STEM SWIVEL - 60"
SCUS*	PERSONALIZED

* PLEASE CONTACT YOUR ABBE REPRESENTATIVE

1. STEM COLOR MATCHES THE STRUCTURE

LIGHT SOURCE

INTERGRATED LED	
LED	1700lm INITIAL @ 10.8W

INPUT VOLTAGE

120V	120 VOLTS
-------------	-----------

COLOR TEMPERATURE

27K	2700K
30K	3000K
35K	3500K
40K	4000K

COLOR RENDERING

80	80CRI
90	90CRI

DIMMING TYPE

010V	0-10 VOLTS DIMMING 1%
-------------	-----------------------

* TRIAC POSSIBILITY ON REQUEST

METAL STRUCTURE COLOR

BLK	BLACK
WHT	WHITE
SLV	SILVER
S [*]	PERSONALIZED

* PLEASE CONSULT THE COLOR PAGE

ACRYLIC DIFFUSER

CL	CLEAR
CG	CLEAR FROSTED
OP	OPAL WHITE
D [*]	PERSONALIZED

* PLEASE CONSULT THE COLOR PAGE



LINGEN_01-P




PROJECT

REFERENCE NUMBER

LINGEN_01-P-

NOTES

PRODUCT SPECIFICATION

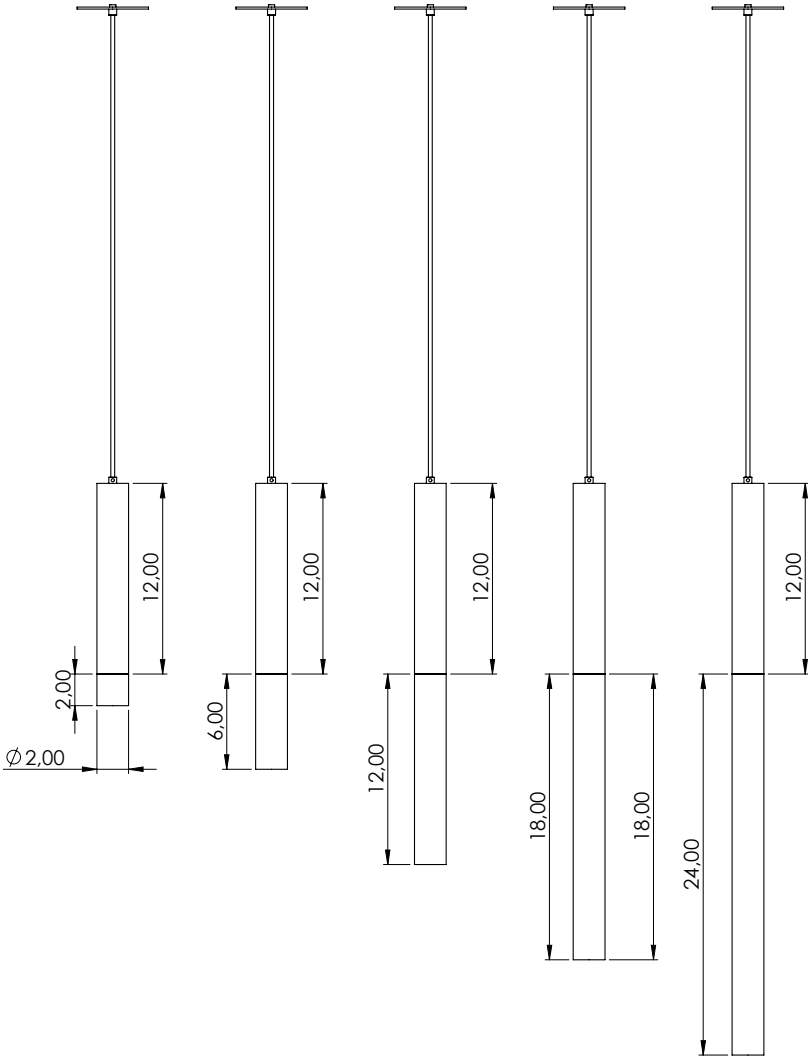

FEATURES

CERT. UL / cUL:	E313355
VOLTAGE:	INDOOR USE ONLY
FINISH:	120V
	POWDER COATED



COLOR PAGE



STANDARD COLORS



BLK



WHT



SLV

SOLID RAL COLORS



1018



2011



3012



3002



4009



4005



5024



5010



6019



6029



1028



2004



3022



3004



4003



4007



5015



5008



6018



6020



7035



7036



7006



7043



7022

* FOR MORE COLOR OPTIONS, PLEASE CONTACT YOUR ABBE REPRESENTATIVE
* ADDITIONAL COSTS MAY APPLY

METALIC FINISHES



GLD



ALU



PRL

WIRE COLOR



BC



WC



CC

