

NOUMEA-P



PROJECT

REFERENCE NUMBER

EX

NOUMEA-P- **10** **BC** - LED - 120V - **30K** 80 - 010V - **BLK**

MODEL SUSPENSION SOURCE TENSION CCT CRI DIMMING STRUCTURE

DESIRED DELIVERY DATE

QUANTITY

NOTES

CONFIGURATIONS



ORDER

CODE

MODEL

10 NOUMEA 10' + 12' of FLEXIBLE LED
18 NOUMEA 18' + 20' of FLEXIBLE LED
CUS* PERSONALIZED
* PLEASE CONTACT YOUR ABBE REPRESENTATIVE

SUSPENSION

BC BLACK CABLE - 72"
WC WHITE CABLE - 72"
CC CLEAR CABLE - 72"
T30¹ RIGID STEM - 30"
T60¹ RIGID STEM - 60"
TS30¹ RIGID STEM SWIVEL - 30"
TS60¹ RIGID STEM SWIVEL - 60"
SCUS* PERSONALIZED
* PLEASE CONTACT YOUR ABBE REPRESENTATIVE
1. STEM COLOR MATCHES THE STRUCTURE

LIGHT SOURCE

INTERGRATED LED
LED NOUMEA 10 - 5856lm INITIAL @ 88W
 NOUMEA 18 - 9760lm INITIAL @ 146.4W

INPUT VOLTAGE

120V 120 VOLTS

COLOR TEMPERATURE

27K 2700K
30K 3000K
40K 4000K
60K 6000K

COLOR RENDERING

80 80CRI

DIMMING TYPE

010V 0-10 VOLTS DIMMING 1%
* TRIAC POSSIBILITY ON REQUEST

METAL STRUCTURE COLOR

BLK BLACK
WHT WHITE
SLV SILVER
S___* PERSONALIZED
* PLEASE CONSULT THE COLOR PAGE

FEATURES

CERT. UL / cUL: E313355
 INDOOR USE ONLY
 VOLTAGE: 120V
 FINISH: POWDER COATED



NOUMEA-P





PROJECT

REFERENCE NUMBER

NOUMEA-P-

NOTES

PRODUCT SPECIFICATION

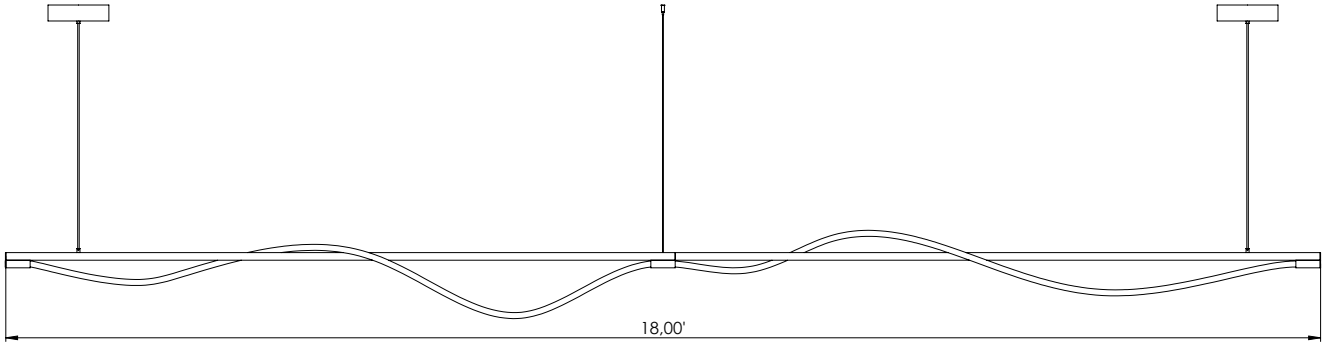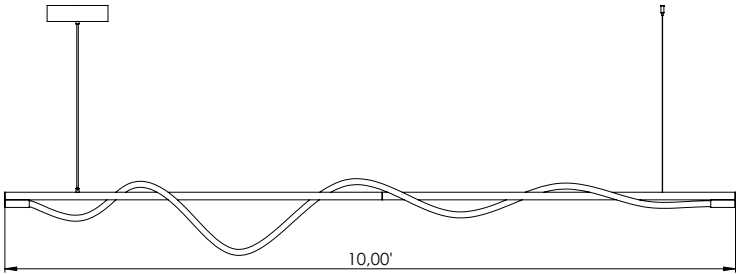

FEATURES

CERT. UL / cUL:	E313355
VOLTAGE:	INDOOR USE ONLY
FINISH:	120V
	POWDER COATED



COLOR PAGE



STANDARD COLORS



BLK



WHT



SLV

SOLID RAL COLORS



1018



2011



3012



3002



4009



4005



5024



5010



6019



6029



1028



2004



3022



3004



4003



4007



5015



5008



6018



6020



7035



7036



7006



7043



7022

* FOR MORE COLOR OPTIONS, PLEASE CONTACT YOUR ABBE REPRESENTATIVE
* ADDITIONAL COSTS MAY APPLY

METALIC FINISHES



GLD



ALU



PRL

WIRE COLOR



BC



WC



CC

