

# SALAR-S01



**PROJECT**

**REFERENCE NUMBER**

**EX**

SALAR-S01- **24** **FP** - LED - 120V - **30K** **80** - 010V - **WHT**

MODEL MOUNTING SOURCE TENSION CCT CR DIMMING STRUCTURE

**DESIRED DELIVERY DATE**

**QUANTITY**

**NOTES**

**CONFIGURATIONS**



**ORDER**

**CODE**

**MODEL**

- 09** SALAR TYPE 1 Ø9" x 2.75"
  - 12** SALAR TYPE 1 Ø11.7" x 2.75"
  - 16** SALAR TYPE 1 Ø15.7" x 2.75"
  - 20** SALAR TYPE 1 Ø19.6" x 2.75"
  - 24** SALAR TYPE 1 Ø23.6" x 2.75"
  - CUS\*** PERSONALIZED
- \*PLEASE CONTACT YOUR ABBE REPRESENTATIVE

**MOUNTING**

- FP** CEILING MOUNT
- BC** BLACK CABLE - 72"
- WC** WHITE CABLE - 72"
- CC** CLEAR CABLE - 72"

**LIGHT SOURCE**

- INTERGRATED LED**
- LED** 10.8W - 720lm INITIAL (Ø09)
  - 15.6W - 1040lm INITIAL (Ø12)
  - 26.4W - 1760lm INITIAL (Ø16)
  - 43.2W - 2880lm INITIAL (Ø20)
  - 62.4W - 4160lm INITIAL (Ø24)

**INPUT VOLTAGE**

- 120V** 120 VOLTS

**COLOR TEMPERATURE**

- 27K** 2700K
- 30K** 3000K
- 35K** 3500K
- 40K** 4000K

**COLOR RENDERING**

- 80** 80CRI
- 90** 90CRI

**DIMMING TYPE**

- 010V** 0-10 VOLTS DIMMING 1%
- \* TRIAC POSSIBILITY UPON REQUEST

**METAL STRUCTURE COLOR**

- BLK** BLACK
  - WHT** WHITE
  - SLV** SILVER
  - S\_\_\_\*** PERSONALIZED
- \* PLEASE CONSULT THE COLOR PAGE

**FEATURES**

CERT. UL / cUL:	E313355
VOLTAGE:	INDOOR USE ONLY
FINISH:	120V
	POWDER COATED



# SALAR-S01




PROJECT

REFERENCE NUMBER

NOTES

PRODUCT SPECIFICATION

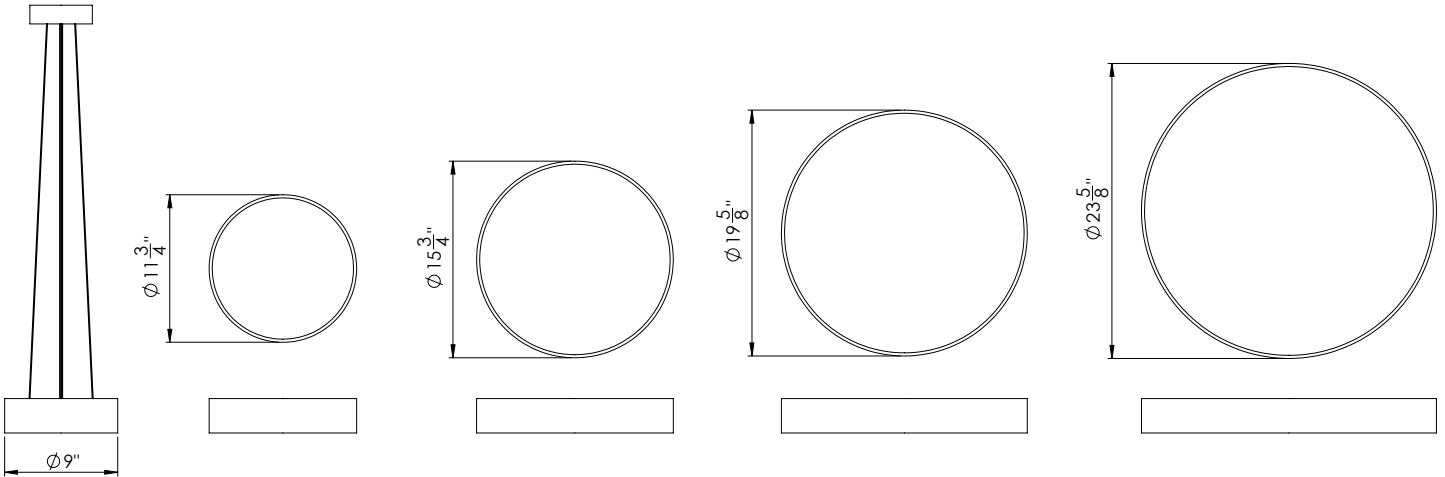

FEATURES

CERT. UL / cUL:	E313355
VOLTAGE:	INDOOR USE ONLY
FINISH:	120V
	POWDER COATED



# COLOR PAGE



## STANDARD COLORS



BLK



WHT



SLV

## SOLID RAL COLORS



1018



2011



3012



3002



4009



4005



5024



5010



6019



6029



1028



2004



3022



3004



4003



4007



5015



5008



6018



6020



7035



7036



7006



7043



7022

\* FOR MORE COLOR OPTIONS, PLEASE CONTACT YOUR ABBE REPRESENTATIVE

\* ADDITIONAL COSTS MAY APPLY

## METALIC FINISHES



GLD



ALU



PRL

## WIRE COLOR



BC



WC



CC

