

SALAR-S01



PROJECT

REFERENCE NUMBER

EX

SALAR-S01- **24** **FP** - LED - 120V - **30K** **80** - 010V - **WHT**

MODEL MOUNTING SOURCE TENSION CCT CR DIMMING STRUCTURE

DESIRED DELIVERY DATE

QUANTITY

NOTES

CONFIGURATIONS



ORDER

MODEL

- 09** SALAR TYPE 1 Ø9" x 2"
12 SALAR TYPE 1 Ø11.7" x 2"
16 SALAR TYPE 1 Ø15.7" x 2"
20 SALAR TYPE 1 Ø19.6" x 2"
24 SALAR TYPE 1 Ø23.6" x 2"
CUS* PERSONALIZED
*PLEASE CONTACT YOUR ABBE REPRESENTATIVE

MOUNTING

- FP** CEILING MOUNT
BC BLACK CABLE - 72"
WC WHITE CABLE - 72"
CC CLEAR CABLE - 72"

LIGHT SOURCE

- INTERGRATED LED**
LED 10.8W - 720lm INITIAL (Ø09)
15.6W - 1040lm INITIAL (Ø12)
26.4W - 1760lm INITIAL (Ø16)
43.2W - 2880lm INITIAL (Ø20)
62.4W - 4160lm INITIAL (Ø24)

INPUT VOLTAGE

- 120V** 120 VOLTS

COLOR TEMPERATURE

- 27K** 2700K
30K 3000K
35K 3500K
40K 4000K

COLOR RENDERING

- 80** 80CRI
90 90CRI

DIMMING TYPE

- 010V** 0-10 VOLTS DIMMING 1%
* TRIAC POSSIBILITY UPON REQUEST

METAL STRUCTURE COLOR

- BLK** BLACK
WHT WHITE
SLV SILVER
S_____* PERSONALIZED
* PLEASE CONSULT THE COLOR PAGE

CODE

FEATURES

CERT. UL / cUL: E313355
INDOOR USE ONLY
VOLTAGE: 120V
FINISH: POWDER COATED



SALAR-S01




PROJECT

REFERENCE NUMBER

SALAR-S01

NOTES

PRODUCT SPECIFICATION

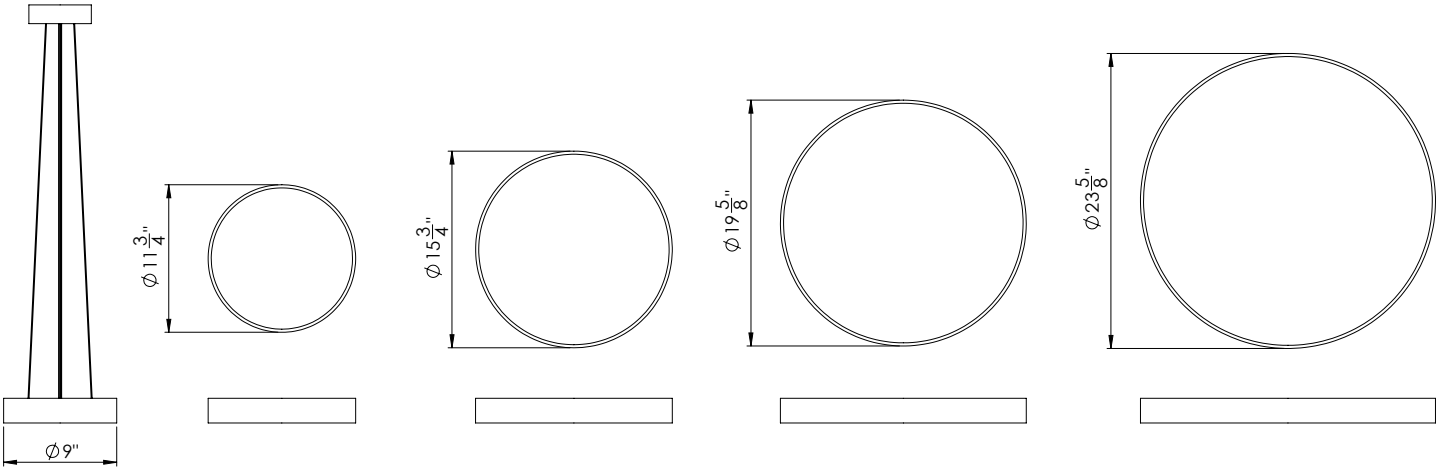

FEATURES

CERT. UL / cUL:	E313355
VOLTAGE:	INDOOR USE ONLY
FINISH:	120V
	POWDER COATED



COLOR PAGE



STANDARD COLORS



SOLID RAL COLORS



* FOR MORE COLOR OPTIONS, PLEASE CONTACT YOUR ABBE REPRESENTATIVE
* ADDITIONAL COSTS MAY APPLY

METALIC FINISHES



WIRE COLOR

