

TULA-W



PROJECT

REFERENCE NUMBER

EX

TULA-W- 4X2 UD - LED - 120V - 30K 010V - WHT OP
MODEL DIRECTION SOURCE TENSION CCT DIMMING STRUCTURE DIFFUSER

DESIRED DELIVERY DATE:

QUANTITY

NOTES

CONFIGURATIONS

ORDER

MODEL

4X2 TULA Ø4" x 2.3"

LIGHTING DIRECTION

UD HAUT ET BAS |UP AND DOWN

LIGHT SOURCE

LED 7W - 850lm INITIAL

INPUT VOLTAGE

120V 120 VOLTS

COLOR TEMPERATURE

30K 3000K

DIMMING TYPE

010V 0-10 VOLTS DIMMING 1%
* TRIAC POSSIBILITY ON REQUEST

METAL STRUCTURE COLOR

BLK BLACK
 WHT WHITE
 S___* PERSONALIZED
 * PLEASE CONSULT THE COLOR PAGE

DIFFUSER

CL CLEAR
 CG CLEAR FROSTED
 OP OPAL WHITE

CODE

4X2

UD


LED

120V

30K

010V

PRODUCT SPECIFICATIONS

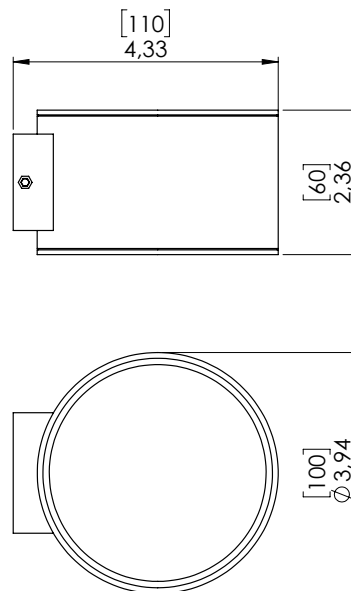

FEATURES

CERT. UL / cUL: E313355
 INGRESS PROTECTION: OUTDOOR USAGE
 VOLTAGE: IP54
 FINISH: 120V
 POWDER COATED



COLOR PAGE



STANDARD COLORS



BLK



WHT



SLV

SOLID RAL COLORS



1018



2011



3012



3002



4009



4005



5024



5010



6019



6029



1028



2004



3022



3004



4003



4007



5015



5008



6018



6020



7035



7036



7006



7043



7022

* FOR MORE COLOR OPTIONS, PLEASE CONTACT YOUR ABBE REPRESENTATIVE

* ADDITIONAL COSTS MAY APPLY

METALIC FINISHES



GLD



ALU



PRL